

18W	TC-D	G24d-2	50W	MBF	E27	50W	HPS-T	E27	IP44	EN 60598		12 joules	
-----	------	--------	-----	-----	-----	-----	-------	-----	------	----------	--	-----------	--

A range of robust, circular aluminium bollards with a powder coat textured grey finish.

- Choice of fresnel lens or louvre optic
- Recessed tamper-resistant bolts
- Root or flange mounting versions
- Three choices of lamp type

Materials/Finish




Head: Die-cast aluminium, painted textured grey.
 Optic: Fresnel lens in clear polycarbonate or aluminised plastic louvres protected by clear polycarbonate sleeve.
 Post: Aluminium, finished textured grey.

Installation/Mounting

Flange or root mounting, latter option embeds 450mm into the ground.
 250mm flange plate version fixes via four 15mm Ø holes at 200mm centres. 60mm Ø central hole for wiring. Three way terminal block for 2 x 4mm² cable.

Specification

To specify state:
 Circular section aluminium bollard with louvred/fresnel lens head. Root/flange mounted.
 As Thorn Chartor.

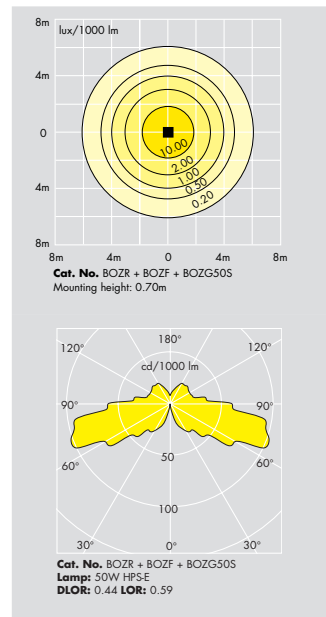

Louvre optic

Ordering Guide Lamps to be ordered separately.

Lamp type & rating	Description	Weight (kg)	Cat. No.
	Head with fresnel lens optic	1.3	BOZFGY
	Head with louvre optic	1.1	BOZLGY
MBF 50W	Control gear	1.8	BOZG50M
HPS-T 50W	Control gear	1.8	BOZG50
TC-D 18W	Control gear	1.4	BOZG18
	Post with flange plate	5.0	BOZPGY
	Post for root mounting	6.4	BOZRGY

For complete fitting please specify head, gear and post.
 Export voltages available, refer to page 553 for details.