


**DUAL
FLASHER
FV8**



RTE/FV8

The FV8 Dual Flasher Unit is primarily designed for use at School Patrol Crossings, but can be used on any application where a Dual Flashing circuit is required. The unit is designed to operate on a 240 volt AC 50Hz supply giving a Dual Flash rate of 80 flashes per minute $\pm 20\%$ with a maximum loading of 150 watts per circuit at 240 volts AC.

The unit is now available in New Re-designed Robust Enclosure to IP55 specification and is covered by our normal 2 year warranty period.

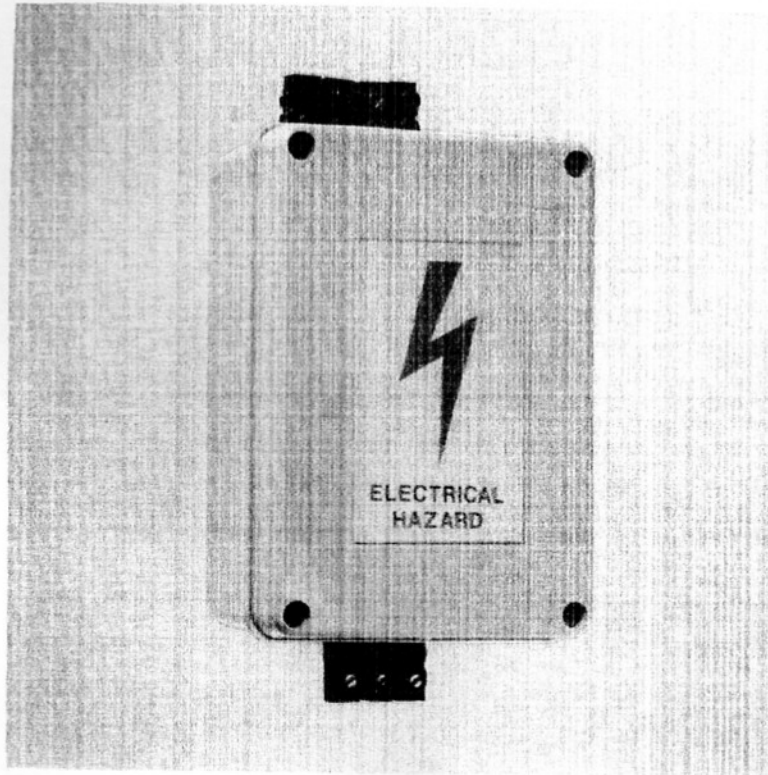

DIMENSIONS

OVERALL (Including Connections)
140mm H \times 75mm W \times 55mm D

WEIGHTS

Nett: 200 Gms. Gross: 250 Gms.

WARNING

Insulation testing by "MEGGER" will damage internal components. The unit should be disconnected from circuit before insulation testing.

ROYCE THOMPSON ELECTRIC LTD



320 CHEAPSIDE
BIRMINGHAM B5 6AX · ENGLAND
Tel: 021-622 7441/2/3