



HALDO bollards

Halo Bollard

Features

- Innovative circular stem gives all round flexibility. Available in 270mm and 420mm signface dimensions. Slimline profile gives maximum visibility to motorists or pedestrians.
- All signfaces and panels are an integral part of the rotational moulding, up to 40% of the nominal wall thickness. This gives a long fade free life and prevents removal by scratching or solvents - such as graffiti removers.
- Single fixing point to allow for orientation of the signface at any point and to simplify attachment/detachment of the bodyshell.
- The bodyshell can be retro-fitted onto an existing Haldo Basbox with the use of a Halo Light Tray and Lid.



Halo Bollard Shell



All Round Flexibility



Single Fixing Point

Halo Bollard

Specification

Head and stem
 Rotationally moulded U.V. stabilised polymers. The head and stem joint is a unique patented bond. Signfaces and stem are integrally moulded.
 Dimensions (see fig. 1 & fig. 1a)

- Head & Stem Part Numbers**
 C6/HAL270/11 270mm single aspect c/w fixing band
 C6/HAL420/11 420mm single aspect c/w fixing band
 C6/HAL270/12 270mm double aspect c/w fixing band
 C6/HAL420/12 420mm double aspect c/w fixing band

To order select the DTp diagram number for the signface from the range below (fig.2) and specify in brackets after the part number e.g. C6/HAL270/11(610L) - Halo bodyshell single aspect with keep left arrow

Fig. 1

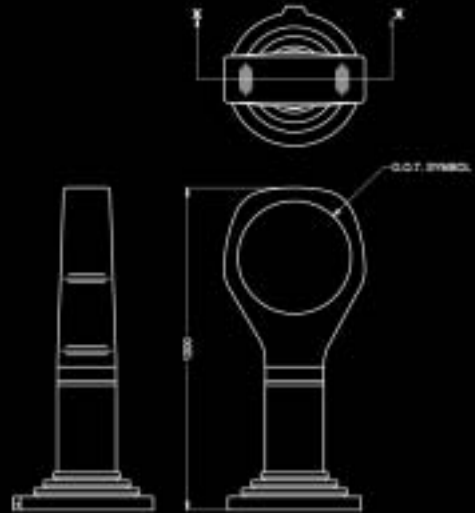


Fig. 1a

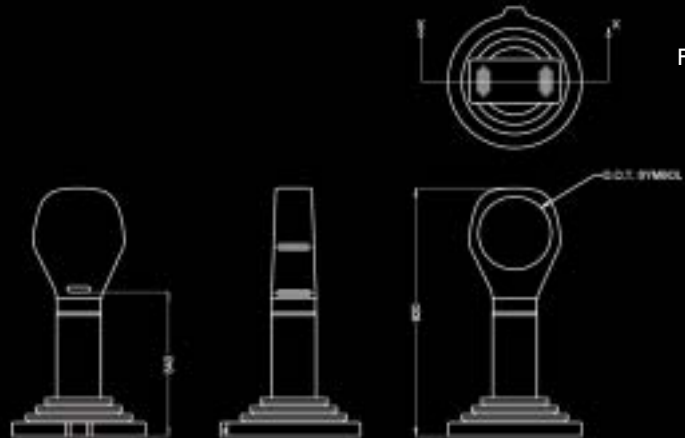


Fig. 2

