


# VENNER

## TYPE MD1QP

LEAFLET L3

SYNCHRONOUS MOTOR DRIVEN 30 AMP SINGLE-POLE TIME SWITCH HAND-SET OR SOLAR DIAL IN CAST METAL CASE

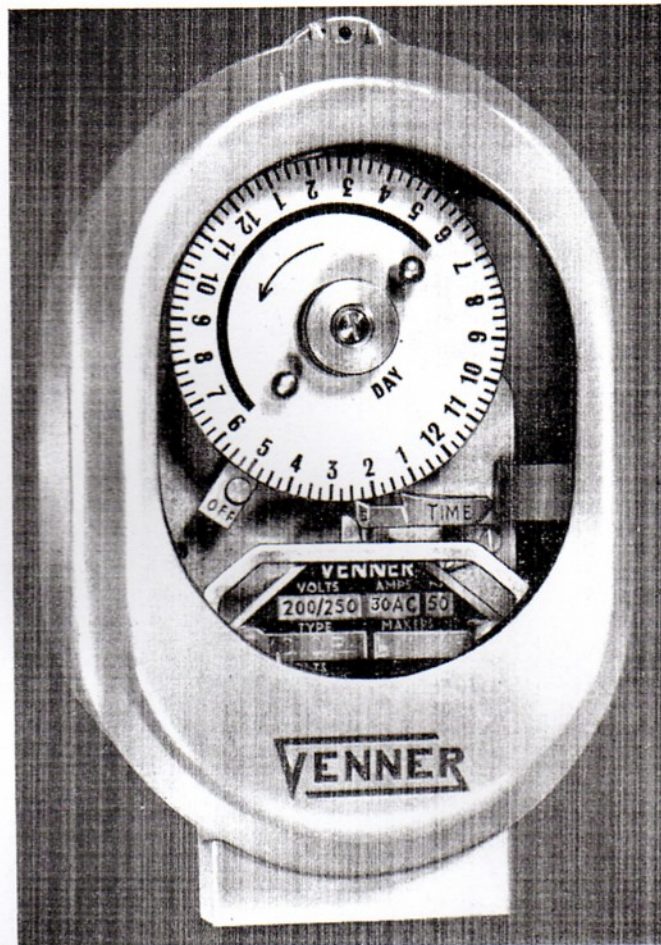

Though of the same basic design as the Vennerette, the type MD1QP time switch has a slightly larger dial which permits a more accurate selection of the switching times.

It is supplied as standard in a cast metal case type C.151, which can be sealed and being more robust than a plastic case is suitable for fitting into workshops and factories.

The time switch is a self-contained, plug-in unit and can be instantly removed without disconnecting the mains. An overriding manual control is fitted as standard.

Available with day omitting device (suffix S).

MD1QPS - ON switching omitted during any selected day or days.

MD2QPS - Either or both ON switchings omitted during any selected day or days. (not available when switch is fitted with 3 pairs of hands).

## SPECIFICATION

Self-starting synchronous motor driven, keeping accurate mains time. Single-pole fuse in motor circuit.

**DIAL** 24-hour dial with one pair of adjustable hands, type MD1QP. When two ON and two OFF switchings per day are required, the dial is fitted with two pairs of hands and type becomes MD2QP.

When three ON and three OFF switchings per day are required, three pairs of hands are fitted and type designation becomes MD3QP.

The number of pairs of hands required should always be specified when ordering.

**MINIMUM SETTING** The minimum ON period is half an hour.

**CASE** Aluminium die-cast type C.151 fitted with quick-release bottom-hinged front cover with glass window.

Alternative cases.

Weatherproof, wall mounting with tapped bosses for conduit entry top and bottom type C.118A.

Weatherproof, wall mounting with tapped bosses for conduit entry top and bottom and space to accommodate s.p. or d.p. fuses, type C.322.

**MANUAL KNOB** Manual knob enables the circuit to be switched ON or OFF without affecting normal dial operation.

**TERMINAL BLOCK** Supplied as standard with a four-way terminal block wired internally for three-way connection. Available with four-way connection when specified. (See diagrams.) A clock fuse is fitted to both types.

**RATING** 30 amps. 100/120 or 200/250 volts (to be specified when ordering) 50 cycles A.C. only.

**DIMENSIONS** 3 $\frac{1}{2}$ " wide  $\times$  3 $\frac{7}{8}$ " deep  $\times$  5 $\frac{5}{8}$ " high. (9.37 cm.  $\times$  8.73 cm.  $\times$  13.5 cm.).

VENNER LIMITED · KINGSTON BY-PASS · NEW MALDEN · SURREY · MALDEN 2442

