




RTE/P.10

FOLLOWING the introduction of the P.9 unit, it was found that this very neat form of enclosure created a demand for a photo-control which could be fitted in a thin housing such as the canopy of a post-top lantern. Whereas the P.9 needs to be fitted into a reasonable thickness of metal, the P.10 has a locking ring behind the flange and will give a watertight seal when mounted in a vertical position.

The P.10 can also be supplied as a detector only, and used in conjunction with the P.42 control unit (Ref. P.4210).

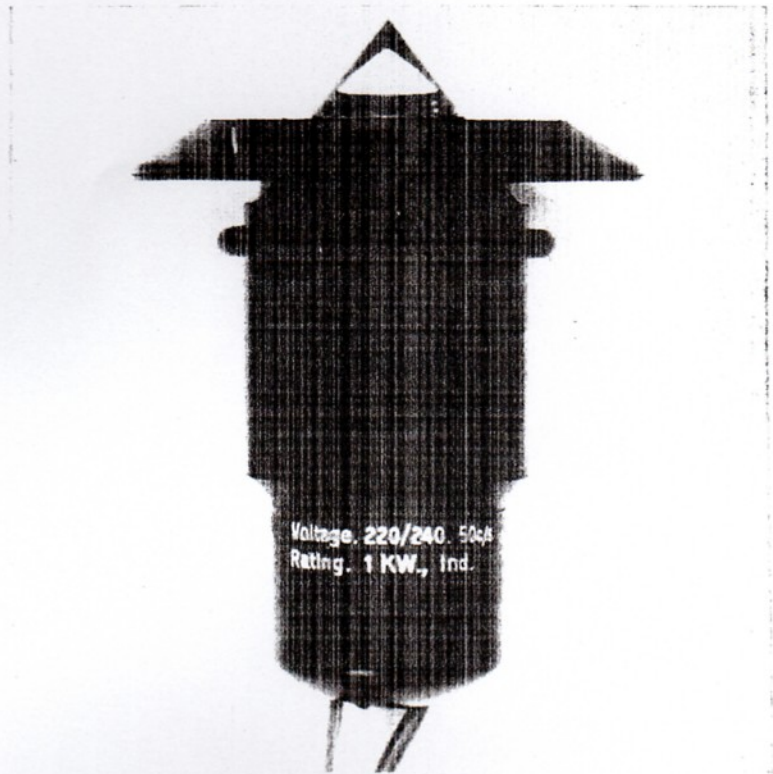

TWO YEAR GUARANTEE

Dimensions: 90 mm. long x 68 mm. dia.
Fixing Hole 38 mm.
Leads 300 mm. long.

Net Weight: 110 gms.

WARNING

Note that when first switched on, these units will energise the lamp circuit, and lamp holder contacts will therefore be "live" until the unit has switched off in daylight.

INSULATION TESTING BY "MEGGER"
can be carried out on circuits including photo-electric cells, but not continuity tests, as the high voltage used may damage the cell.

ROYCE THOMPSON ELECTRIC LTD



320, CHEAPSIDE
BIRMINGHAM B5 6AX. ENGLAND.
Tel: 021-622 7441/2/3