



# RTE/P.6


## LOW PROFILE

**T**O meet those situations where a single composite unit is required for conduit mounting, this model offers the following advantages:

- (a) Single hole fixing for 20mm conduit thread, locknuts and gasket provided.
- (b) Small overall size to reduce outline interference as much as possible. **With hermetically sealed cell.**
- (c) Impact-resistant translucent cover, protects the cell from damage and from harmful ultra-violet rays.
- (d) Conical housing provides self cleaning in rain and prevents birds from perching.
- (e) Switch **on** to switch **off** differential only 1-2.
- (f) Rating 10 amps pure resistive or 5 amps lamp load.
- (g) only 2 watt consumption during daylight hours.
- (h) Calendar moulded on base for marking date of installation.
- (i) All units have cell facing upward. North orientation is not therefore necessary.



TWO YEAR GUARANTEE

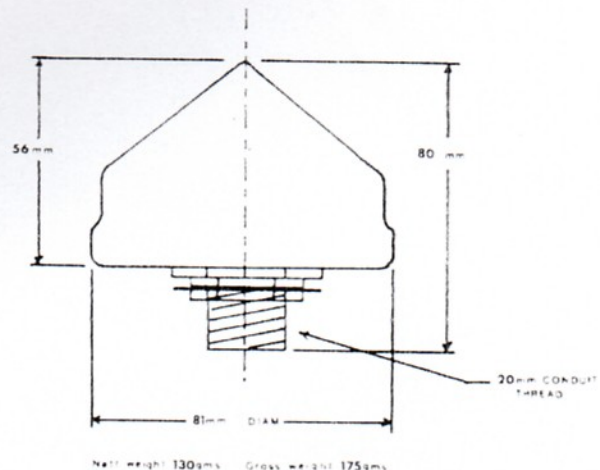

### WARNING

*Note that when first switched on, these units will energise the lamp circuit, and lamp holder contacts will therefore be "live" until the unit has switched off in daylight. INSULATION TESTING BY "MEGGER" can be carried out on circuits including photo-electric cells, but not continuity tests, as the high voltage used may damage the cell.*

ROYCE THOMPSON ELECTRIC LTD



320 CHEAPSIDE  
BIRMINGHAM B5 6AX - ENGLAND  
Tel: 021-622 7441/2/3