




DISCHARGE LAMPS & CONTROL GEAR

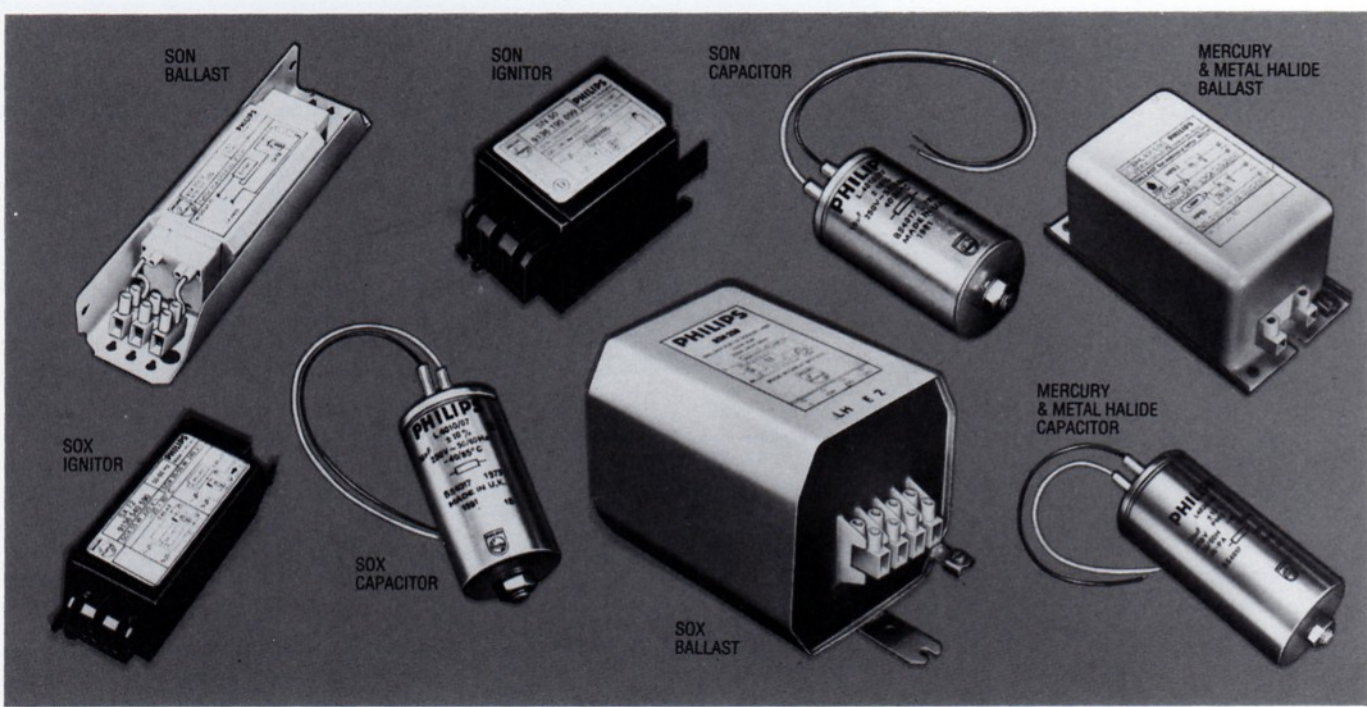


LAMPS WATTAGE	IGNITORS TYPE	CAPACITORS TYPE	BALLASTS TYPE
MERCURY			
50W HPL-N	NOT REQ'D	L4008	BHL 50
80W HPL-N	NOT REQ'D	L4008	BHL 80
125W HPL-N	NOT REQ'D	L4008	BHL 125
125W HPL-R	NOT REQ'D	L4008	BHL 125
250W HPL-N	NOT REQ'D	L4016	BHL 250
250W HPL-R	NOT REQ'D	L4016	BHL 250
400W HPL-N	NOT REQ'D	L4020	BHL 400
400W HPL-R	NOT REQ'D	L4020	BHL 400
700W HPL-N	NOT REQ'D	2 x L4016	BHL 700
700W HPL-R	NOT REQ'D	2 x L4016	BHL 700
1000W HPL-N	NOT REQ'D	2 x L4025	BHL 1000
1000W HPL-R	NOT REQ'D	2 x L4025	BHL 1000
1000W(380/415V)HPL-N	NOT REQ'D	N/A	N/A
2000W(380/415V)HPL-N	NOT REQ'D	3 x L4025	BHL 2000
SOX			
18W SOX	NOT REQ'D	L4005	BSX 18
35W SOX	SX 72	L4008	BSX 355
55W SOX	SX 72	L4008	BSX 355
90W SOX	SX 75 (or SX76)	L4010	BSX 90
135W SOX	SX 74	L5007	BSX 135
135W SOX	NOT REQ'D	L5020	L4135
180W SOX	NOT REQ'D	L5020	L4135

LAMPS WATTAGE	IGNITORS TYPE	CAPACITORS TYPE	BALLASTS TYPE
SON			
50W SON	INTERNAL	L4008	BSN 50
70W SON	INTERNAL	L4010	BSN 70
100W SON	SN 55	L4010	BSN 100
100W SONT/T	SN 55	L4010	BSN 100
150W SON	SN 50	L4016	BSN 150
150W SONT/T	SN 50	L4016	BSN 150
250W SON	SN 50	2 x L4016	BSN 250
250W SONT/T	SN 50	2 x L4016	BSN 250
250W SON/R	SN 50	2 x L4016	BSN 250
400W SON	SN 50	2 x L4020	BSN 400
400W SONT/T	SN 50	2 x L4020	BSN 400
1000W SON	SN 53	4 x L4025	BSN 1000
1000W SONT/T	SN 53	4 x L4025	BSN 1000
210W SON/H	NOT REQ'D	L4016	BHL 250
350W SON/H	NOT REQ'D	L4020	BHL 400
METAL HALIDE			
250W HPI/T	SI 51	L4020	BHL 250
400W HPI/T	SI 51	2 x L4016	BHL 400
400W HPI/BUS	NOT REQ'D	2 x L4016	BHL 400
2000W HPI/T	SI 52	4 x L4025	2 x BHL 1000
2000W (380/415V)HPI/T	SI 54	4 x L4020	BHL 2000



BALLAST DIMENSIONS

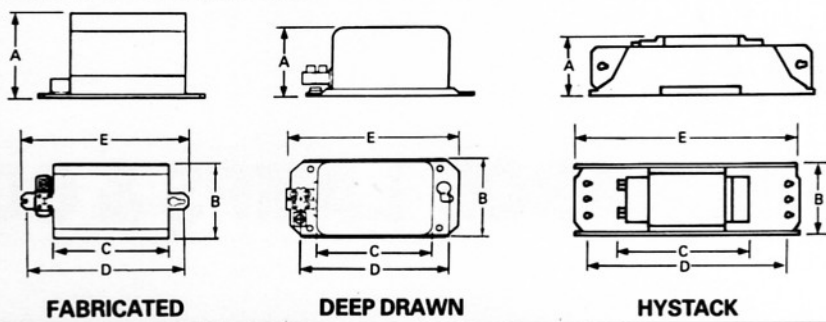

Dimensions in mm

BALLAST	VOLTAGE	A	B	C	D	E	CAN TYPE
MERCURY							
BHL 50	240	63	68	88	102	118	D
BHL 80	240	63	68	88	102	118	D
BHL 125	240	63	68	88	102	118	D
BHL 250	240	67	80	120	134	149	D
BHL 400	240	67	80	120	134	149	D
BHL 700	240	132	114	170	195	210	F
BHL 1000	240	132	114	170	220	235	F
BHL 2000	415	170	169	215	240	255	F

SOX

BSX 18	240	36	45	97	-	-	H
BSX 355	240	38	45	118	180	195	H
BSX 90	240	63	68	88	102	118	D
BSX 135	240	89	85	130	153	168	D
L4135	200/220/240	108	106	130	177	189	F

SON

BSN 50	240	63	68	88	102	118	D
BSN 70	240	63	68	88	102	118	D
BSN 100	240	67	80	120	134	149	D
BSN 150	240	92	90	125	172	184	F
BSN 250	220/240	108	106	130	177	189	F
BSN 400	220/240	108	106	130	177	189	F
BSN 1000	240	169	140	215	240	255	F
BHL 250	240	67	80	120	134	149	D
BHL 400	240	67	80	120	134	149	D

METAL HALIDE

BHL 250	240	67	80	120	134	149	D
BHL 400	240	67	80	120	134	149	D
BHL 400	240	67	80	120	134	149	D
2 x BHL 1000	240	132	114	170	220	235	F
BHL 2000	415	170	169	215	240	255	F

Key: F-Fabricated D-Deep Drawn H-Hystack