



---

# SHEERLINE GROUP B ALUMINIUM COLUMN

---



## APPLICATIONS


MINOR ROADS  
PEDESTRIAN PRECINCTS  
WALKWAYS  
AMENITY

## FEATURES


- All columns have 1" BSP (34mm) threaded top casting for use with screw-in bracket arms or a 76 x 76mm spigot for post top mounted luminaires.
- The properties of low mass, absorption of impact energy and structural stability of aluminium columns combine to provide a high degree of safety to road users. Additionally, they are corrosion resistant and require no painting or maintenance.
- The column is kitemarked to BS3939.




## DIMENSIONS AND DATA

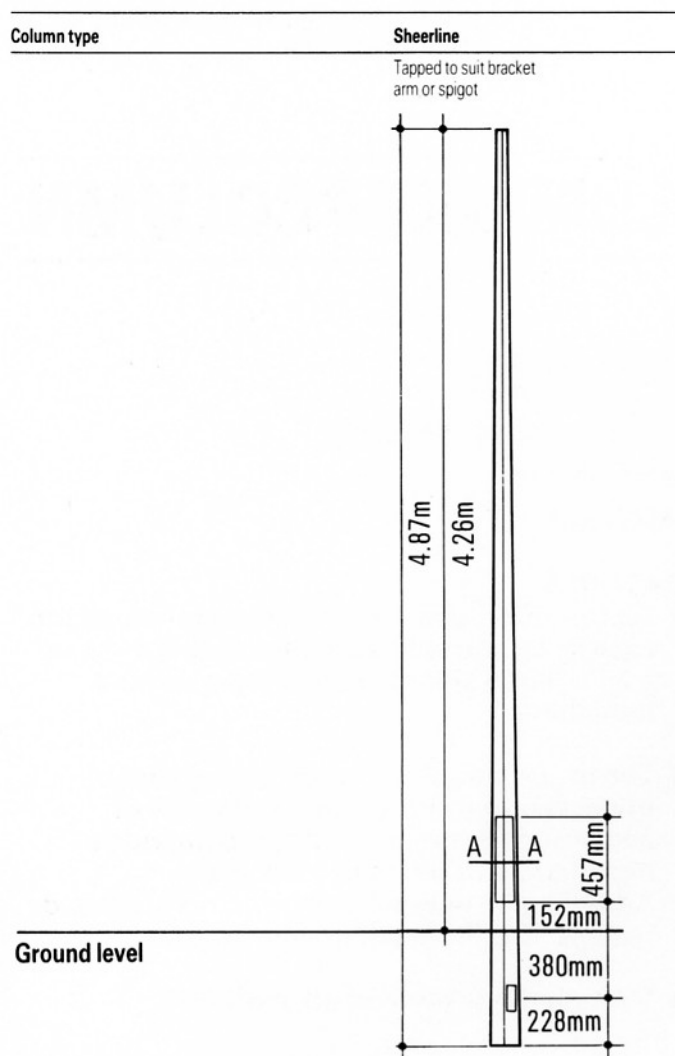


### Section A-A

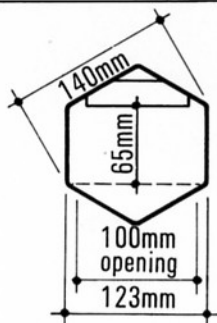


British standard	 3939
Column catalogue no.	QC 3
Surface mounting plate: suffix	FP
Bracket arms	
Post top spigot	QCS 76
Base compartment dimensions:	
Door opening: mm	457 x 100
Compartment depth: mm	65
Baseboard: mm	623 x 89
Cable entry slot: mm	152 x 76
Root coating	
Spare door catalogue no.	QCD 3
Door key catalogue no.	QCK

## ACCESSORIES

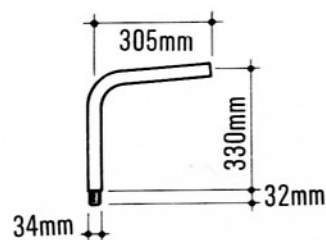

Entry: Side plain 1" BSP (34mm)

Catalogue No. QCBS 534



Spigot casting for QC0, QC1, QC3, and QC4 columns

Catalogue No. QCS 76

### Catalogue numbers and ordering data

QC3 Column only

QCBS 534 Bracket suitable for 1"(34mm) Side entry luminaires.

QCS 76 Spigot casting for post top mounted luminaires.

For additional technical information,  
apply to Marwood Electrical Company Limited