

VENNER


VENNERETTE

← LEAFLET L 2

When set periods of lighting are required and space is restricted, the Vennerette time switch is particularly suitable.

The 'Easiset' dial with two pairs of hands is fitted as standard but one operation per day may be obtained by setting the two ON hands and the two OFF hands adjacent to each other.

The time switch is of plug-in design and may be instantly removed from the case without disconnecting the wiring.

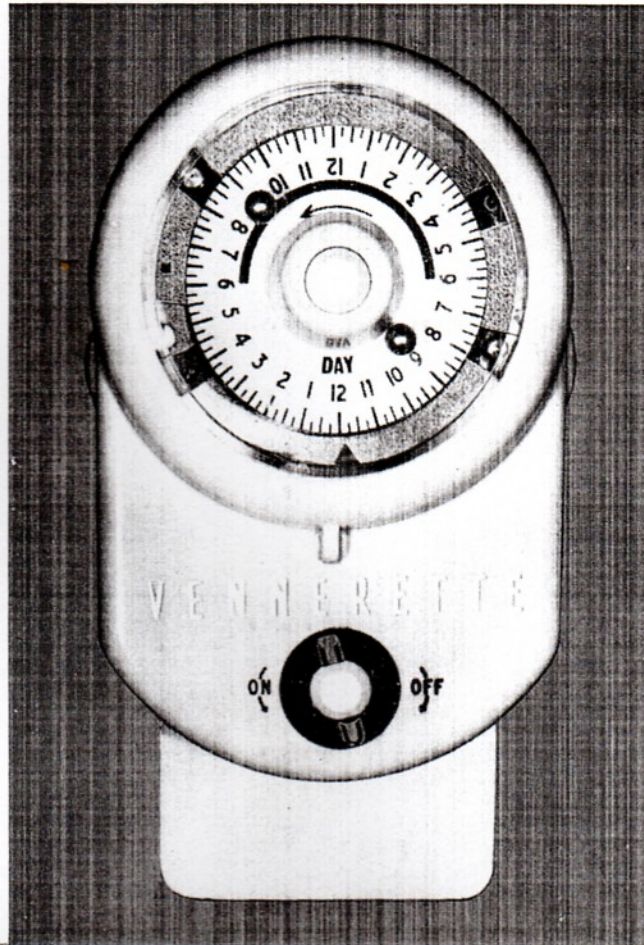

SYNCHRONOUS MOTOR DRIVEN 30 AMP SINGLE-POLE TIME SWITCH
FOR THE AUTOMATIC CONTROL OF HEATING AND LIGHTING

SPECIFICATION

Self-starting synchronous motor driven, keeping accurate mains time. Single-pole fuse in motor circuit.

DIAL 24-hour dial designed for easy setting, arranged to switch ON and OFF once or twice per day at set times.

MINIMUM SETTING Minimum ON period is one hour. Minimum OFF period $\frac{1}{2}$ hour.


CASE Moulded ivory plastic base with plastic clip-on front cover. Extended terminal cover with $\frac{3}{4}$ " conduit knock-out.

MANUAL SWITCH A manual control switch, fitted at the front, enables the circuit to be switched ON or OFF without affecting the normal dial operation.

TERMINAL BLOCK The Vennerette is supplied as standard with a four-way terminal block, the clock motor having independent connections. See diagram.

RATING 30 amps. 100/120 or 200/250 volts (to be specified when ordering) 50 cycles AC

DIMENSIONS $3\frac{1}{16}$ " wide \times 3" deep \times $5\frac{3}{8}$ " high.
(7.78 cm. \times 7.62 cm. \times 13.66 cm.)

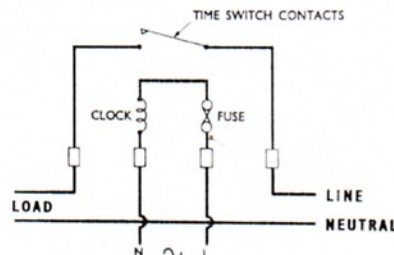

VENNER LIMITED · KINGSTON BY-PASS · NEW MALDEN · SURREY · MALDEN 2442

