


2600 IP65

*For use in
side road
lighting and
residential
schemes*

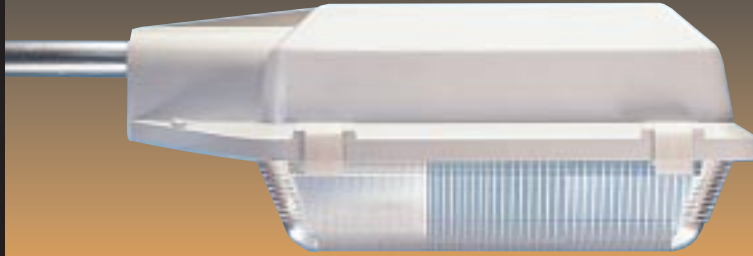

GEAR

Integral or remote

OPTICS

Prismatic Refractor

LAMPS

50-150W SON-T, 18-35W SOX(E),
1/2x24W CFL-L, 42W CFL-T

MATERIALS/FINISH


Canopy: moulded GRP, light-grey finish
Bowl: injection-moulded, UV-stabilised
polycarbonate
Reflectors: high-purity, anodised aluminium

MOUNTING

Side entry or post top (with optional
adaptor)

- For mounting up to 6m.
- Lamp & gear compartments IP65.
- Available with or without NEMA socket, 1 part cell facility.
- Robust polycarbonate and GRP construction.
- Choice of lamp position to give best optical performance. Standard and wide, set in standard position. (50/70/100W)
- Removable gear tray version as standard.
- Excellent corrosion and vandal resistance.
- Simple lamp replacement and low maintenance.
- Remote version available.
- Zone 2 version for 50/70/100W SON-T.

Technical Information - 2600 IP65

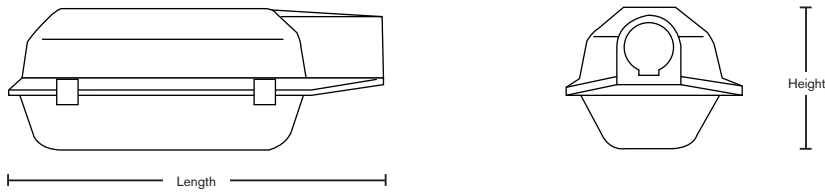

TECHNICAL

| Type | Length (mm) | Width (mm) | Height (mm) | Windage | Weight (kg) |
|------|-------------|------------|-------------|---------|-------------|
| 2600 | 535 | 230 | 210 | 0.07 | 4.6-5.5 |

- Class 1 (must be earthed)
- Ambient temperature -20°C to +25°C
- Mounting: Side entry for spigot 42/56mm dia (with 2 stud fixing) Post-top adapter 60/76mm x 70mm long, 34mm with Flex-o-Fix ref 189100.450
- Standard Ballast 230/240V thermally protected (SON only)

ORDER CODES

| Description | NEMA | W/O NEMA |
|-------------------------------------|------------|-----------|
| 35W SOX Integral Control Gear | 260035N | 260035 |
| 35W SOX Remote Control Gear | 2600RNBC | 2600RBC |
| 26W SOX-E Integral Control Gear | 260026N | 260026 |
| 50W SON-T Integral Control Gear | 260050N | 260050 |
| 50W SON-T Remote Control Gear | 2600RNES | 2600RES |
| 70W SON-T Integral Control Gear | 260070N | 260070 |
| 70W SON-T Remote Control Gear | 2600RNES | 2600RES |
| 100W SON-T Integral Control Gear | 2600100N | 2600100 |
| 150W SON-T Remote Control Gear | 2600RNGES | 2600RGES |
| 18/24W CFL Integral Control Gear | 260018/24N | 260018/24 |
| 2x24W CFL Integral Control Gear | 26002/24N | 26002/24 |
| 42W CFL-T Integral HF Control Gear | 260042N | 260042 |
| 80W HQL-MBF/U Integral Control Gear | 260080N | 260080 |

ATTACHMENTS

| | | |
|---|-------------|---|
| Post Top Adaptor - Extruded Aluminium 60/76mm | 785990. ... | - |
| Post Top Adaptor - Extruded Aluminium 60mm | 786290. ... | - |

GEAR TRAYS

42W CFL-T 2600GT42

Other models available on request.

Examples: Special Colours; Alternative P.E.C; Control; Timed Ignitors

To specify state:

Side road lantern for mounting height 4-6m with glass fibre reinforced polyester housing and clear polycarbonate bowl for SON, SOX and compact fluorescent lamps. IP65, as WRTL 2600.



WRTL Exterior Lighting Ltd
Waterside Park, Golds Hill Way
Tipton, West Midlands
DY4 0PU

Telephone: 0121 521 1234
Facsimile: 0121 521 1250
Email: sales@wrtl.co.uk
www.wrtl.co.uk