

# Our biggest rival

## THE MOON!

But not even the moon can be as reliable as Horstmann controlled lighting.


Horstmann photo-electric street lighting controls automatically switch the lighting ON when daylight falls below the level recommended for road safety.

Two types are available, the T10 which is a single part unit and the T20 which is a two part unit for use where the control gear is mounted in the base compartment of the column.


The type T10 control is soundly constructed on a N.E.M.A. three-pin plug-in base to A.S.A. and C.S.A. standards, which makes for rapid and inexpensive installation. It is completely weatherproof and when plugged in forms a waterproof seal between the base and the socket.

In the type T20 unit the size of the sensor head is small - this can be important where there is not room on the lantern top to fit the socket for a one-part unit.

Both controls are produced to very high engineering standards. They incorporate improved switching ratios, and are omnidirectional.

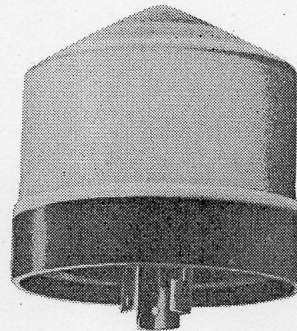

Type T10  
Single part unit

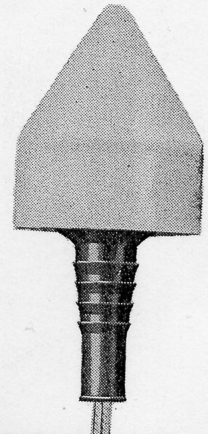

Type T20  
Two part unit



THE HORSTMANN GEAR COMPANY LTD  
NEWBRIDGE WORKS, BATH, BA1 3EF  
Tel: Bath 21141 Telex No. 44897  
Cables: Horstmann, Bath, England.

