



Z5698/9U

Lanterns for Group B Road Lighting

Group B roadlighting lanterns with a cast aluminium post top mounting spigot base housing the control gear. Spun aluminium top canopy. Vandal resistant polycarbonate long or short cone dependent on lamp used, which can be MBF/U, Super SOX or SON.

APPLICATIONS

The lantern is suitable for:

- Group B roadlighting
- All forms of amenity lighting
- Precinct lighting
- Decorative lighting

FEATURES

- Control gear housed in extended cast aluminium spigot cap
- Spun aluminium hinged top canopy
- Injection moulded anti-vandal U.V. stabilised polycarbonate cone
- Control gear mounted on easily removable gear tray


MATERIALS AND FINISH

Canopy: Spun aluminium.

Enclosing cone: Anti-vandal U.V. stabilised polycarbonate.

Spigot cap: Cast aluminium for 76mm dia. x 76mm high spigot.

Finish: Stove enamelled black.

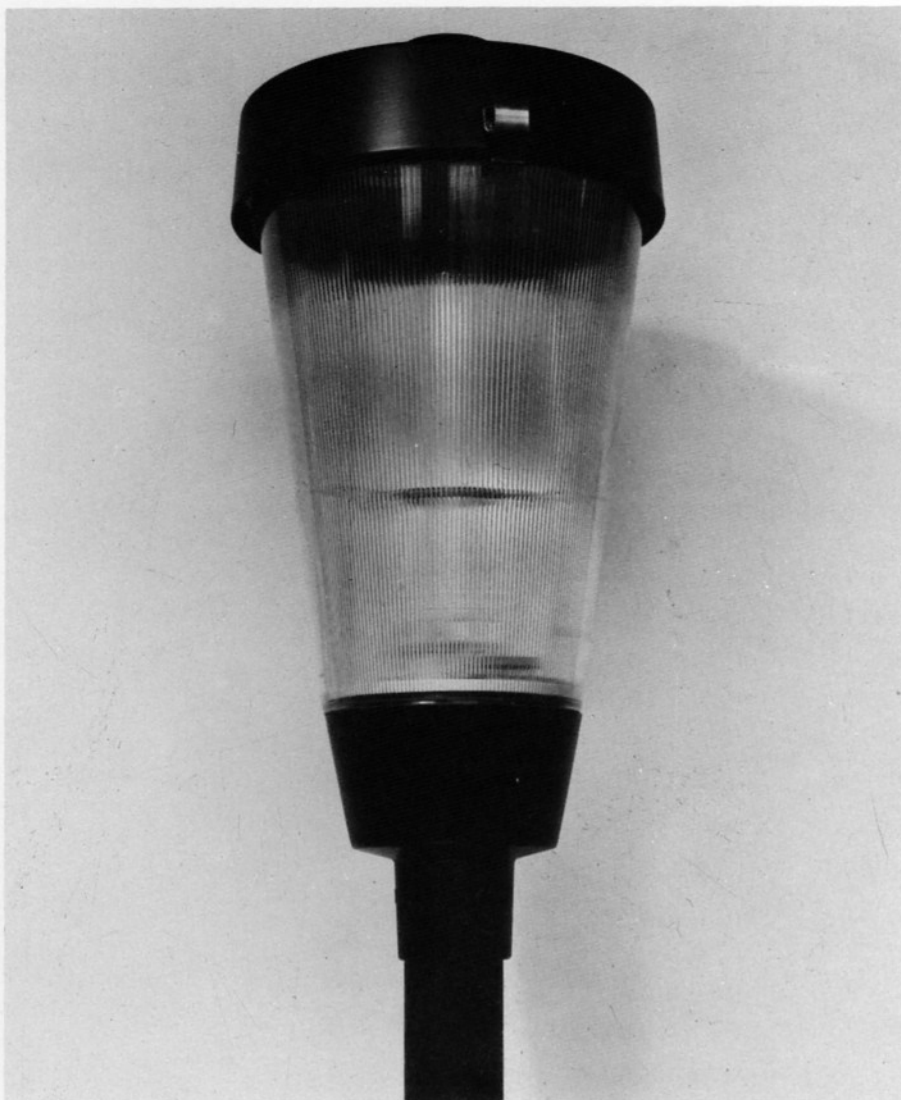

LANTERN WEIGHTS AND WINDAGE DATA

Lantern Weight : Z5698U	6.93 kg	Lantern Windage Area	0.159 sq. m
Lantern Weight : Z5699U-80	6.89 kg	Lantern Windage Area	0.122 sq. m
Lantern Weight : Z5699U-125	7.76 kg	Lantern Windage Area	0.122 sq. m

ORDERING DATA

Z5698U for use with 35-55 watt Super SOX lamp.	Long 406mm cone.
Z5699U//80 for use with 80 watt Truelite MBF/U lamp.	Short 279mm cone.
Z5699U/125 for use with 125 watt Truelite MBF/U lamp	Short 279mm cone.

Made in U.K. Lanterns are packed in pairs.