



Z9580/1/2/3

Lanterns for Group B Road Lighting

Group B roadlighting lanterns with a high pressure precision die-cast body in LM6 aluminium alloy. Side or top entry mounting. Vandal resistant toughened acrylic refractor bowl.

APPLICATIONS

The lantern is suitable for:

- Group B roadlighting
- Security lighting
- Residential lighting
- Car Parks
- Hotel Forecourts
- Shopping Precincts
- Railway Stations

FEATURES

- High pressure die-cast body in LM6 aluminium alloy
- Bowl is a one piece vandal resistant injection moulding
- Control gear in integral type mounted on white enamelled over-reflector
- Low watts loss control gear


MATERIALS AND FINISH

Canopy: High pressure die-casting in LM6 aluminium alloy

Bowl: Toughened vandal resistant acrylic.

Bowl clip: Stainless steel spring catch.

Gear tray: White enamelled sheet steel.

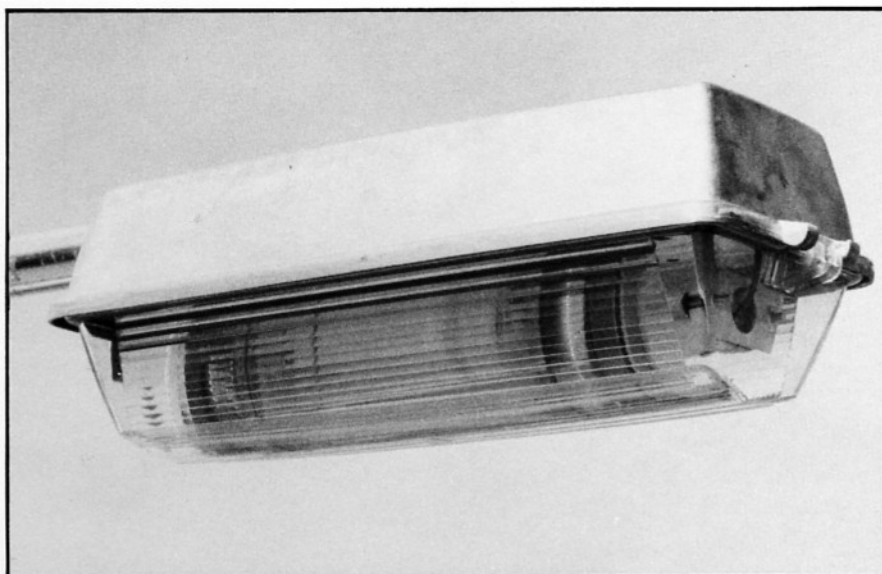

LANTERN WEIGHTS AND WINDAGE DATA

Lantern Weight: Z9580/1	1.6 kg	Lantern Windage Area	0.051m ²
Lantern Weight: Z9582/3	3.1 kg	Lantern Windage Area	0.051m ²

ORDERING DATA

Z9580 Side entry. For 26 watt SOX-E or 18 watt, 35 watt SOX lamps. Remote gear.

Z9581 Top entry. For 26 watt SOX-E or 18 watt, 35 watt SOX lamps. Remote gear.

Z9582 Side entry. For 26 watt SOX-E or 18 watt, 35 watt SOX lamps. Integral gear.

Z9583 Top entry. For 26 watt SOX-E or 18 watt, 35 watt SOX lamps. Integral gear.

Note: Integral gear lanterns for 18 watt SOX lamps to special order only.

Ballast Cat. No. Z1619G. Ignitor Cat. No. Z1598G. Capacitor Cat. No. Z1757X.

Made in U.K. Lanterns are individually packed.