
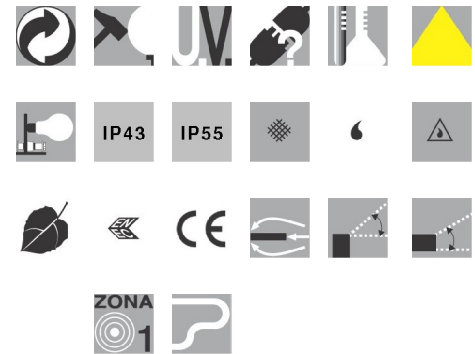


1135 Sella 1



Code	px no. pack.	Gear	Kg	Watt	Base	Colour
312643-00	1	CNR	6.10	SAP-E 70	E27	grey/black
312641-00	1	CNR	6.40	MBF 125	E27	grey/black
312640-00	1	CNR	6.10	MBF 80	E27	grey/black
312648-00	1	CNR	6.80	SAP-E 150	E40	grey/black
312647-00	1	CNR	6.40	SAP-E 100	E40	grey/black
312650-00	1	CNR - DI	6.10	MBF80	E27	grey/black
312651-00	1	CNR - DI	6.40	MBF125	E27	grey/black
312653-00	1	CNR - DI	6.10	SAP-E70	E27	grey/black
312657-00	1	CNR - DI	6.40	SAP-E100	E27	grey/black

Housing: In fiber glass nylon.

Cover: Hinge-opening, in self-extinguishing f.g. nylon.

Reflector: In anodized, pressed and polished 99.85 aluminium, 6/8 μ thick, with flux recovery system.

Diffuser: In clear, vandal resistant and V2 self-extinguishing poly-carbonate, UV-stabilized, anti-yellowing. With latches.

Lampholder: In ceramics, with silver-plated contacts. Socket E27; E40.

Electric gear: 230V/50Hz power supply. Silicone wire terminated with quick-connect clamps in admiralty brass with glass braid, 1 sqmm cross section. Nylon 2P + T terminal block with maximum allowed lead cross section of 4 sqmm.

Equipment: When the housing and the cover are open, they stay hooked on for easy maintenance. Felt gasket. 60 mm mast-top or mast-arm mounting.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP557 protection for lamp housing and IP437 for electric gear box according to EN 60529 standards. It has been guaranteed the ENEC European Certificate of Conformity.

Lamps: MBF80; MBF125; SAP-E 70; SAP-T70; SAP-T100; SAP-T150.

Fixture angle with mast-top mounting: 11°.

Wind surface: 1000 sqcm.

Non-polluting louvre, ideal for installation in zone 1 (UNI10819).